



TOP VIEW


DETAIL-C

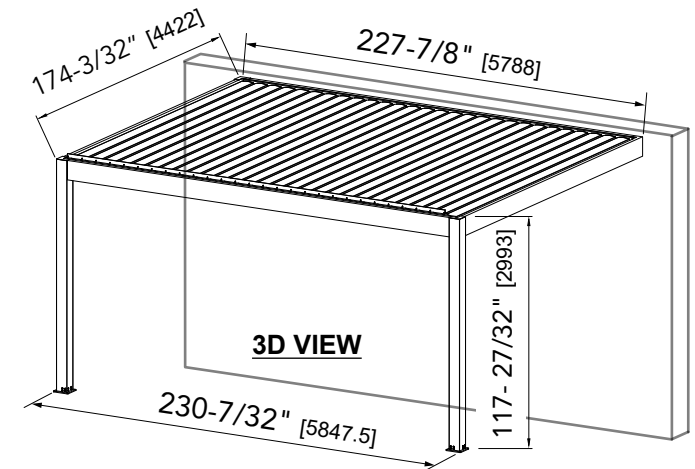


3D VIEW

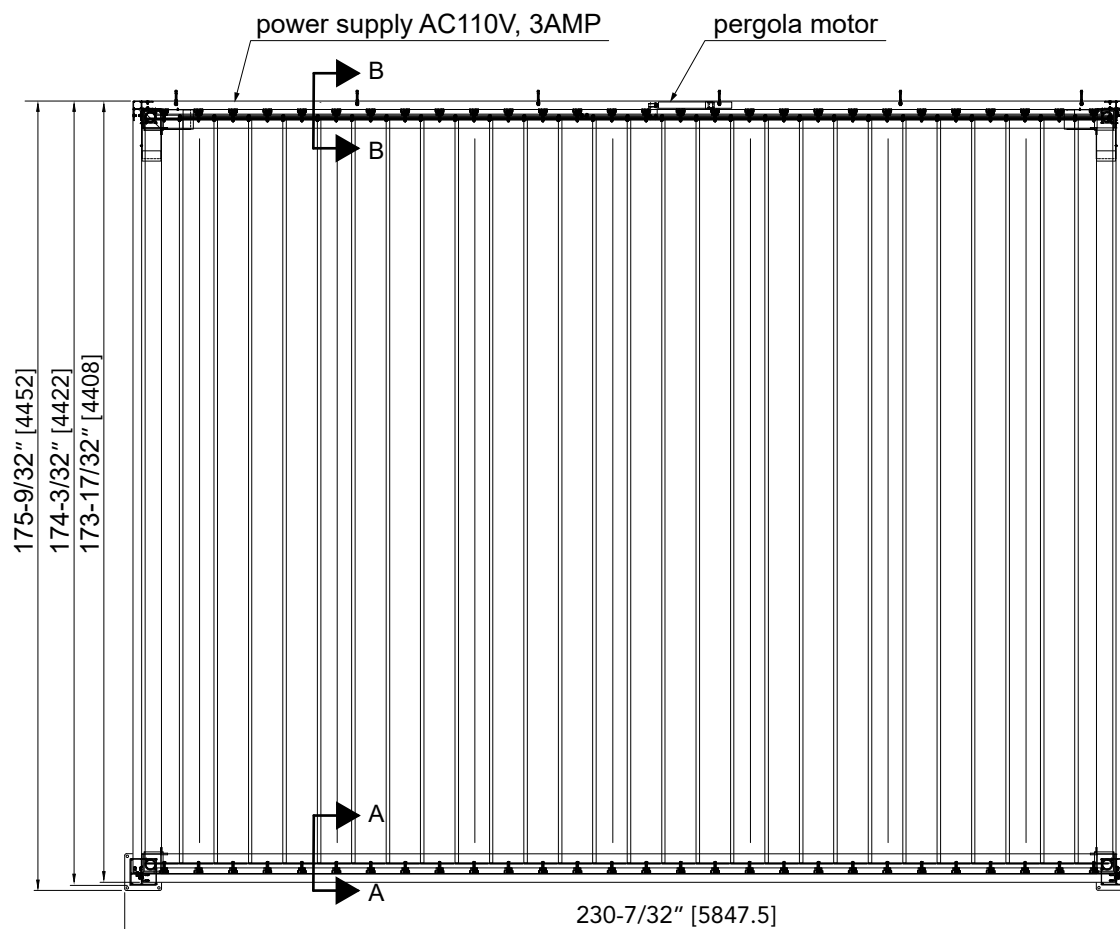


LATERAL VIEW 2

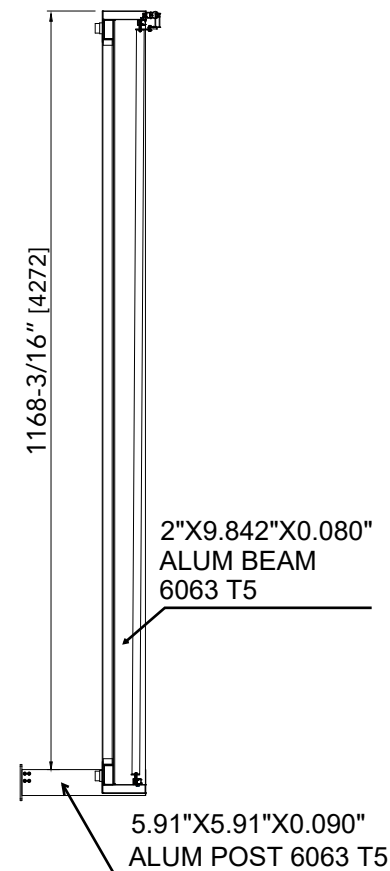


LATERAL VIEW 1

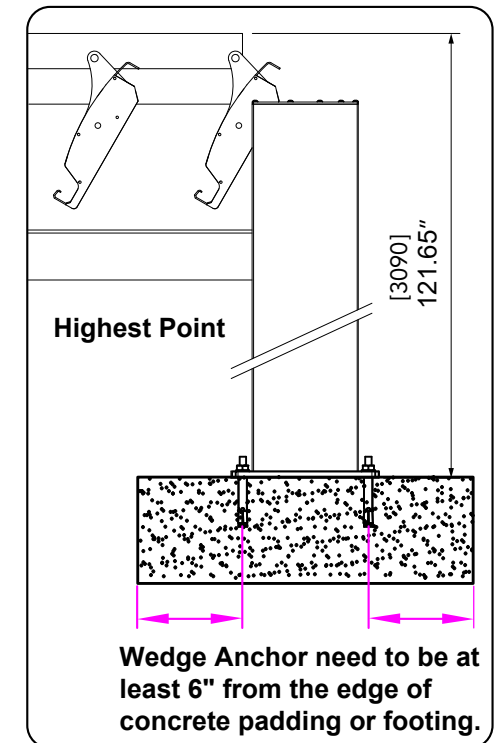


DETAIL-C

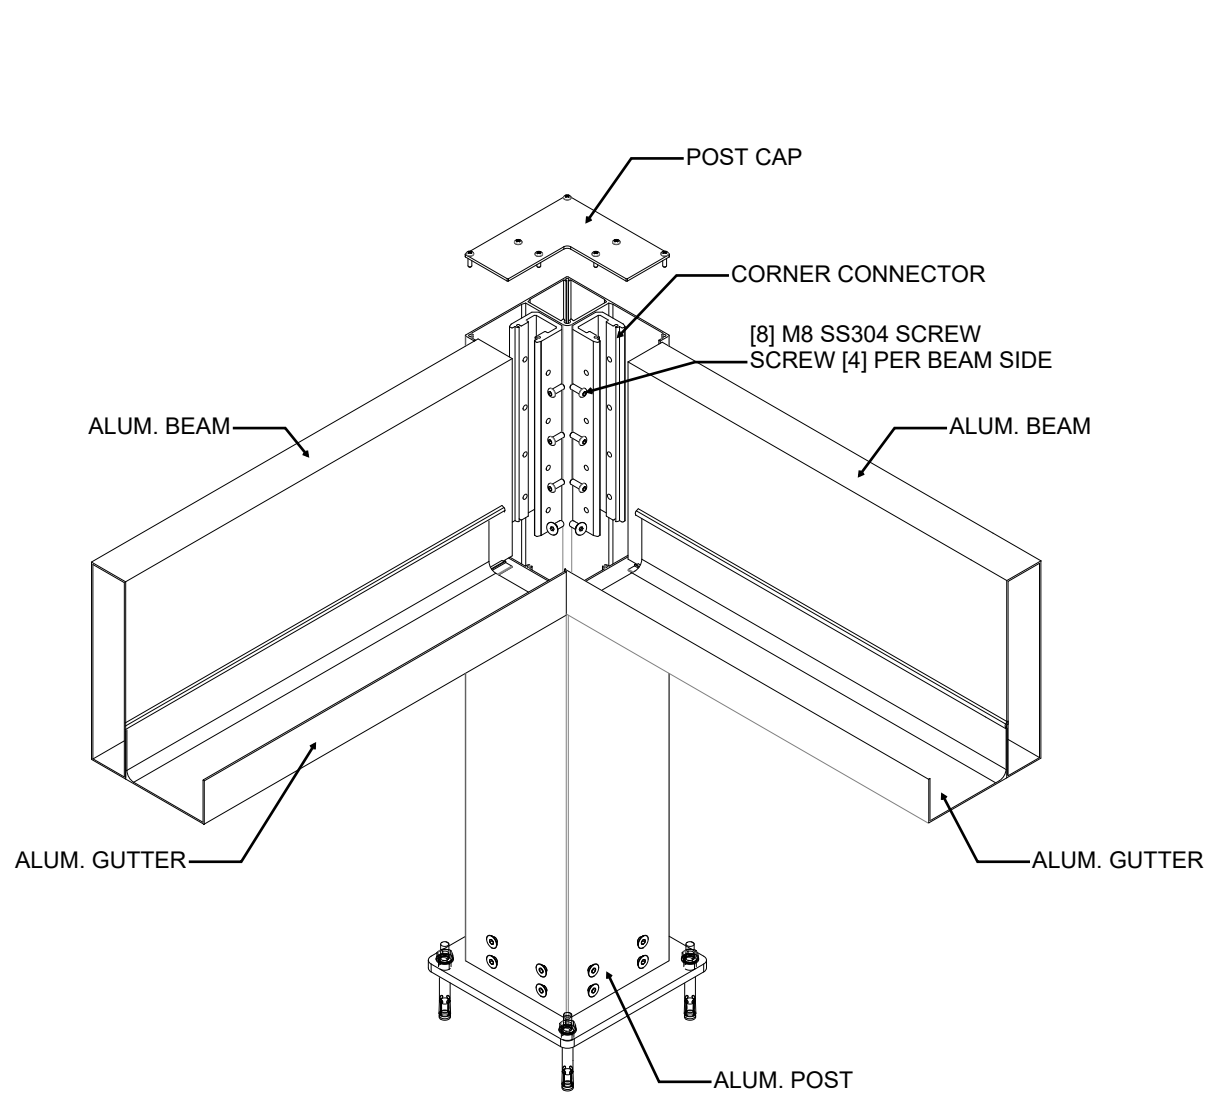




BEAM-POST CONNECTION

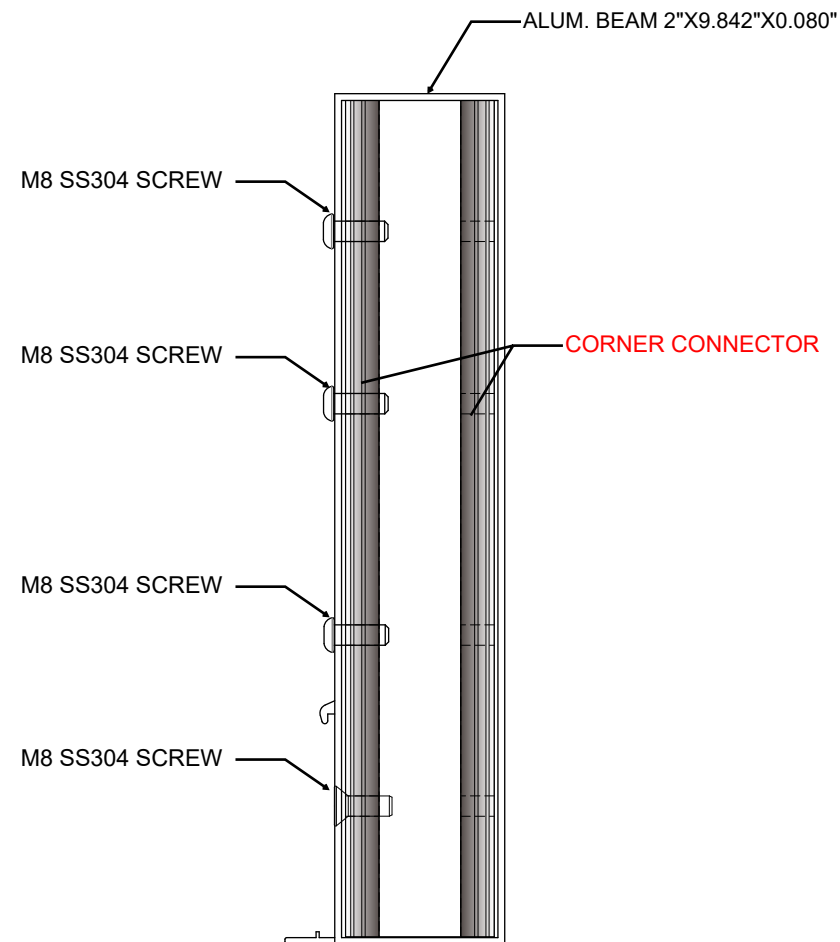


**SECTION A-A
LOUVER BEAM REINF. DETAIL**

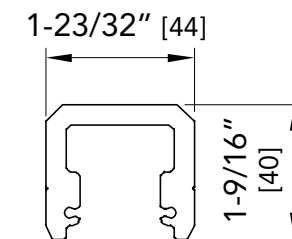


CORNER CONNECTOR

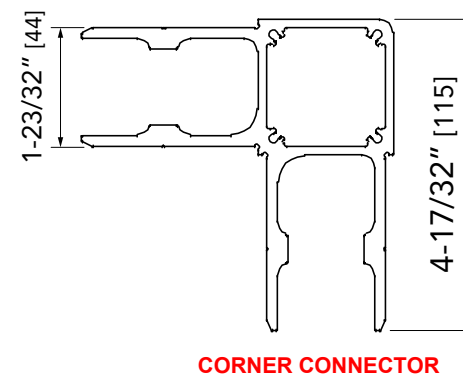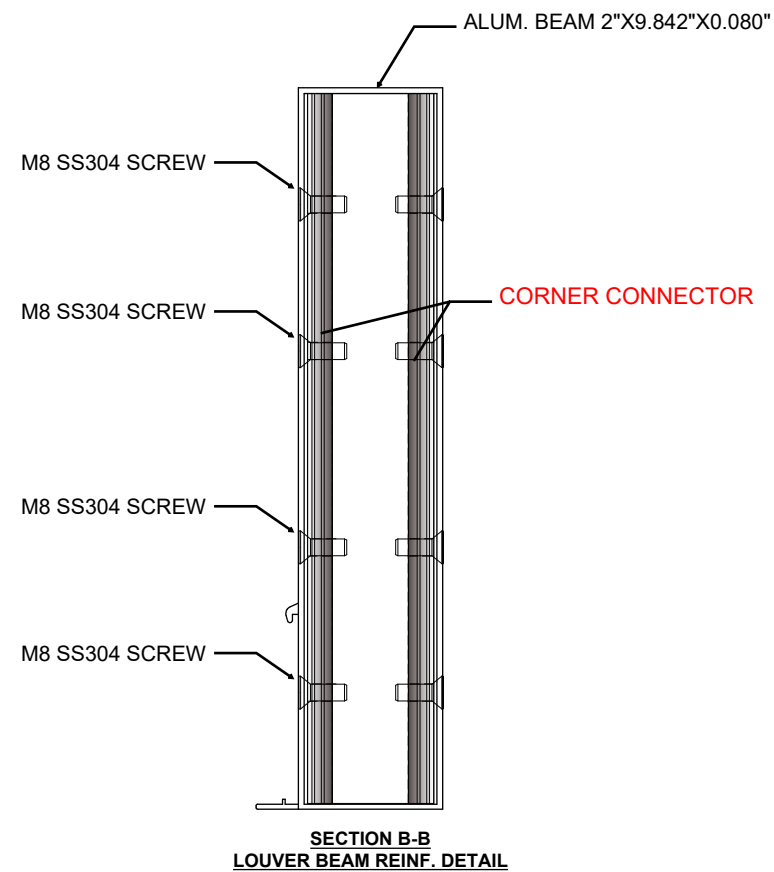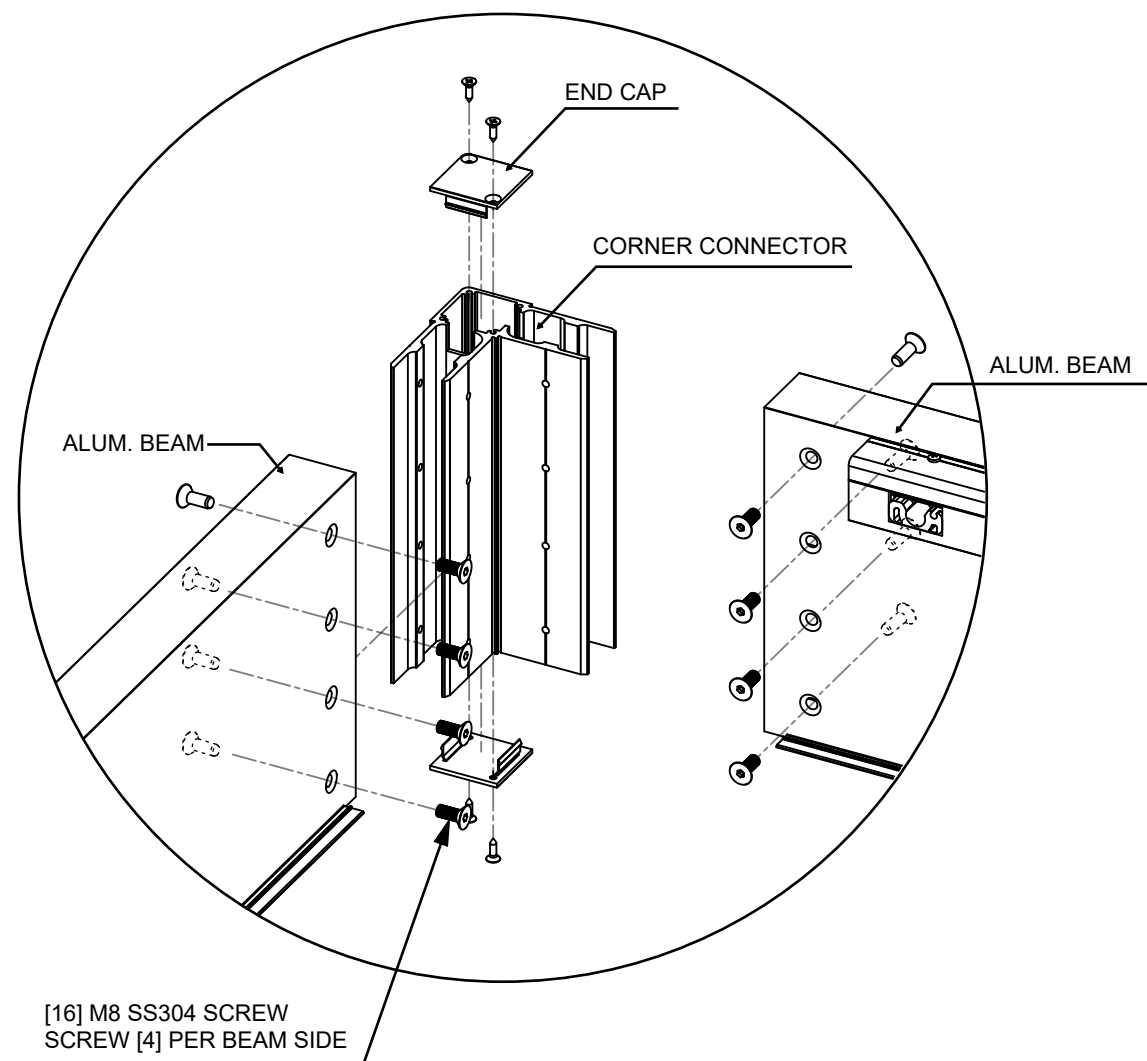

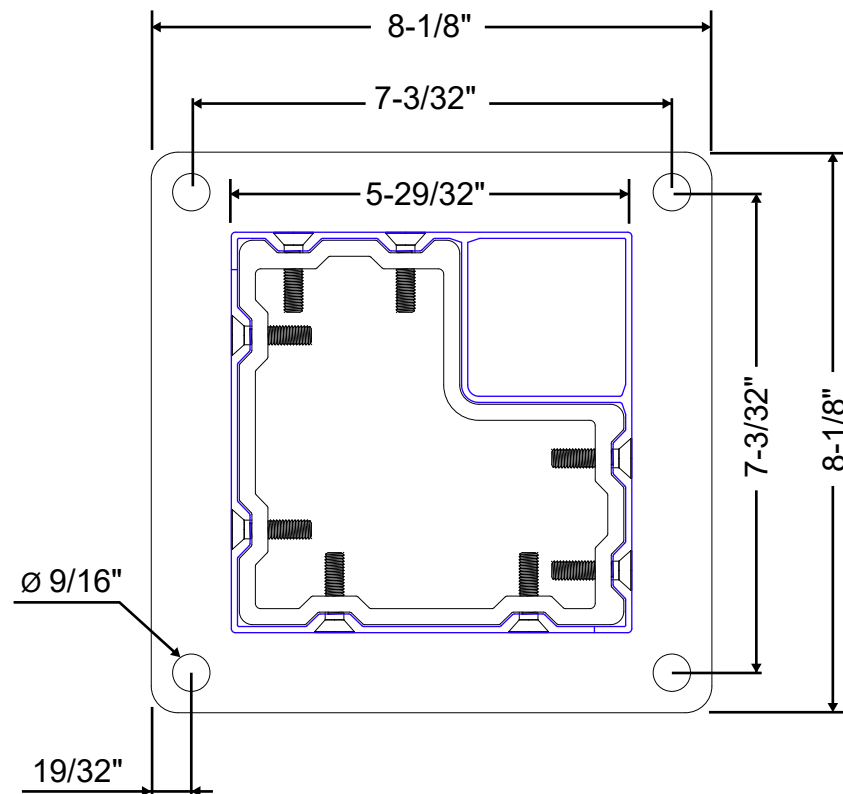

[16] 5/16" SS304 SELF DRILLING SCREWS
[4] PER POST SIDE

(4) 1/2" HILTI HIT HY200+ HAS R
304/316 ANCHOR WITH 6"
MIN EMBED INTO CONCRETE FOOTING
WITH 6.5" MIN EDGE DISTANCE

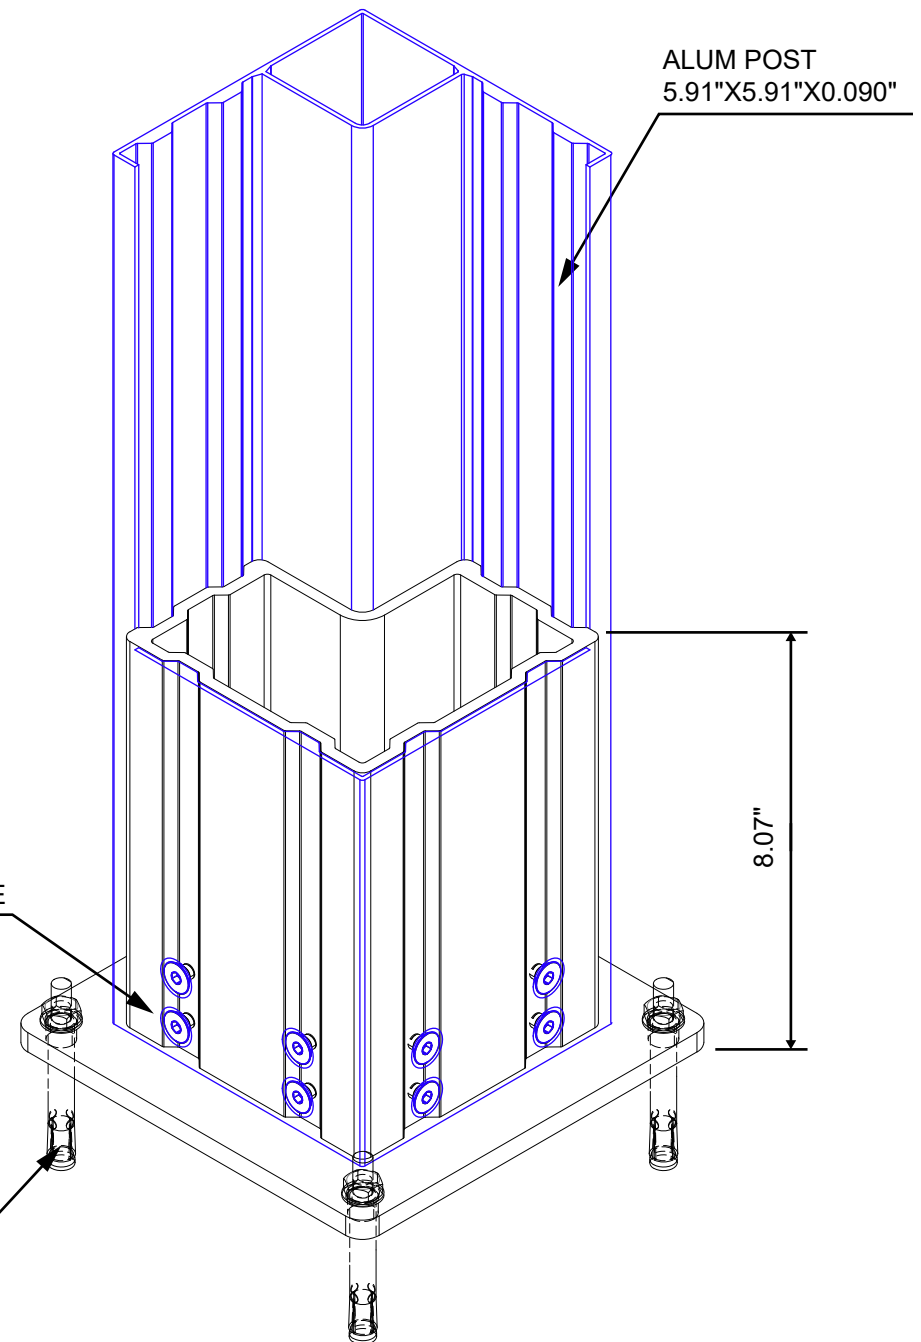

ALL EXTRUSIONS ALUMINUM 6063 T5

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28

7 light strips in total

Louver	Louver	Gutter	Beam	Post	Footing Plate

EXTRUSIONS